


ELEVATION
SCALE: 1:20

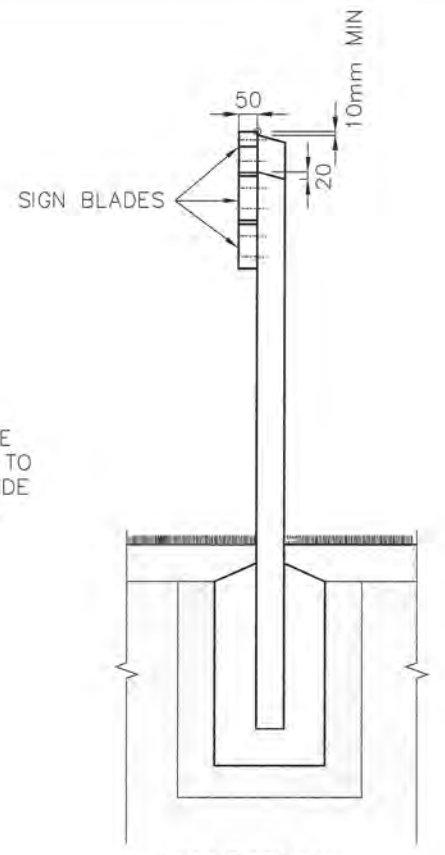

SECTION
SCALE: 1:20

GENERAL NOTES

- ENSURE THAT WORK IS IN ACCORDANCE WITH BRISBANE CITY COUNCIL ENVIRONMENTAL BEST PRACTICE NOTES.
- SITE SETOUT TO BE VERIFIED BY SUPERINTENDENT OR LANDSCAPE ARCHITECT PRIOR TO THE COMMENCEMENT OF CONSTRUCTION WORKS.
- VERIFY LOCATION OF ALL SERVICES AND EASEMENTS PRIOR TO THE COMMENCEMENT OF WORKS.
- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DISTANCES.
- VERIFY ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION.
- STRUCTURES HAVE BEEN DESIGNED ON THE ASSUMPTION THAT THE MINIMUM ALLOWABLE BEARING CAPACITY FOR SOIL IS 100KPA AND TERRAIN CATEGORY = 2.5.
- IN EACH CASE ENGINEERING CERTIFICATION AND MODIFICATION AS NECESSARY WILL BE REQUIRED FOR PARTICULAR SOIL AND SITE CONDITIONS.
- THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE BRISBANE CITY COUNCIL.
- DIMENSIONS IN MILLIMETRES (UNO).

FOOTINGS

- AS DETAILED
- TIMBER WORK**
- ALL TIMBER TO BE ACQ TREATED ROUGH SAWN SELECT GRADE HARDWOOD OF A SINGLE SPECIES.
 - ALL TIMBER IN CONTACT WITH GROUND TO BE PRESERVATIVE TREATED TO HAZARD CLASS H5 TO AS1604.1-2000 AND HAVE A DURABILITY CLASS 1 (IN GROUND) TO AS5604-2003.
 - ALL TIMBER TO BE FREE OF KNOTS, SPLINTERS, CRACKS OR ANY MAJOR DEFECT.
 - ALL EXPOSED EDGES TO BE ARRISSED 4MM.
 - POSTS TO BE 75X75MM WITH CHAMFERED TOPS
 - SIGN BLADES TO BE 120X38MM STANDARD.
 - IF A LARGER BLADE IS NEEDED DUE TO INCREASE IN TEXT, THE STANDARD SIGN BLADE MAY BE SUBSTITUTED FOR A 240X38MM BLADE.
 - CURVED SIGN BLADE HEIGHT VARIES.

SIGN BLADES


- SIGN BLADES TO BE ROUTED TIMBER TO SIZES SHOWN.
- ROUTING OF LETTERING.
- LETTERING TO BE HELVETICA FONT, 60MM IN HEIGHT.

FIXINGS


- ALL FIXINGS TO BE STAINLESS STEEL.
- SIGN BLADES - TO BE FIXED TO POSTS WITH 75MM BUGLE HEAD SCREWS.

FINISHES


- TIMBER TO BE PRIMED AND THEN FINISHED WITH MINIMUM 2 NO. COATS OF DULUX 'PINE NEEDLE' COLOUR.
- COLOUR SELECTION IN ACCORDANCE WITH THE NATURAL AREAS DESIGN MANUAL COLOUR SCHEDULE.

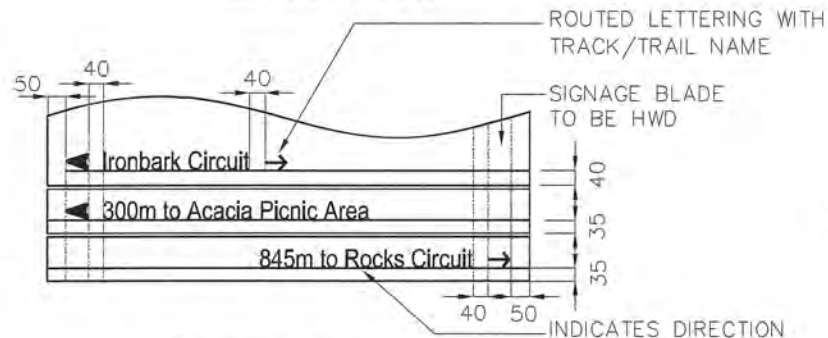


LETTERING LAYOUT
SCALE: 1:20

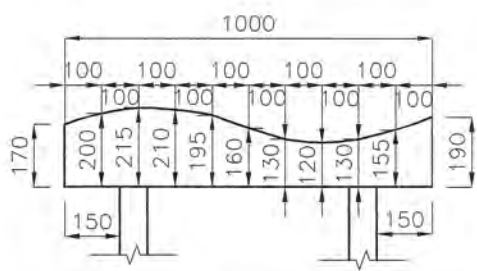


CURVE SETOUT 2
SCALE: 1:20

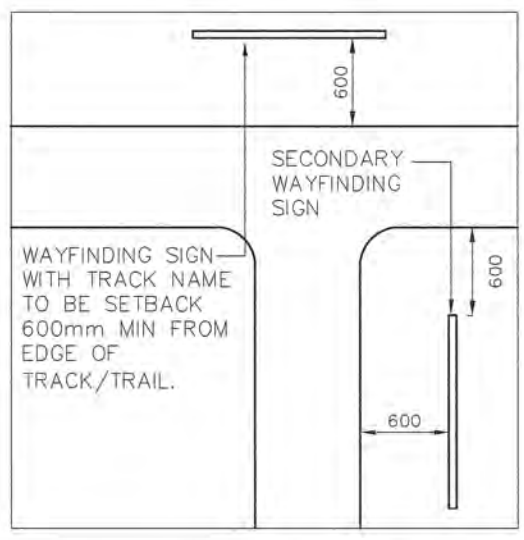

SIGN LOCATION PLAN
SCALE: 1:50

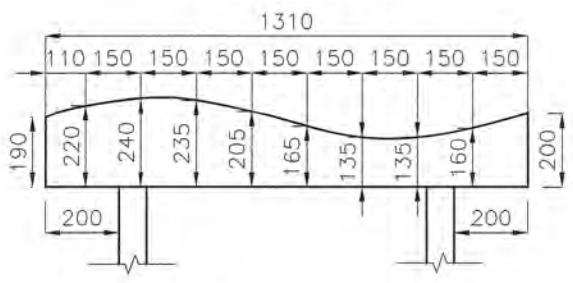

CURVE SETOUT 1
SCALE: 1:20

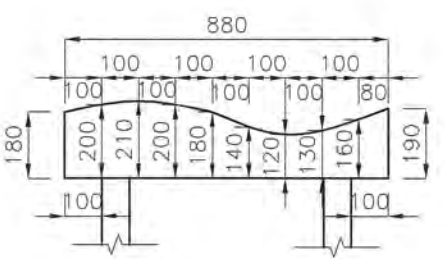

CURVE SETOUT 3
SCALE: 1:20

ISSUE	AMENDMENT	DRAWN DATE	CHK'D DATE	APPR'D DATE
A	ORIGINAL ISSUE	DEC '14	DEC '14	DEC '14

DRAWING AUTHORISED FOR PUBLICATION			
DESIGN	CPO - P&D	DATE	DEC '14
DRAWN	CPO - P&D	DATE	DEC '14
CHECKED	BI - FSG - AS	DATE	DEC '14
DRAWING FILENAME	BSD-10512.dwg		
ASSOCIATED PLANS			



BRISBANE CITY COUNCIL STANDARD DRAWING	
ADVISORY SIGN -	SCALE AS SHOWN
NATURAL AREA -	DWG No. BSD-10512
WAYFINDING	ORIGINAL SIZE A3
	REVISION A