


WALKING TRACK – SECTION

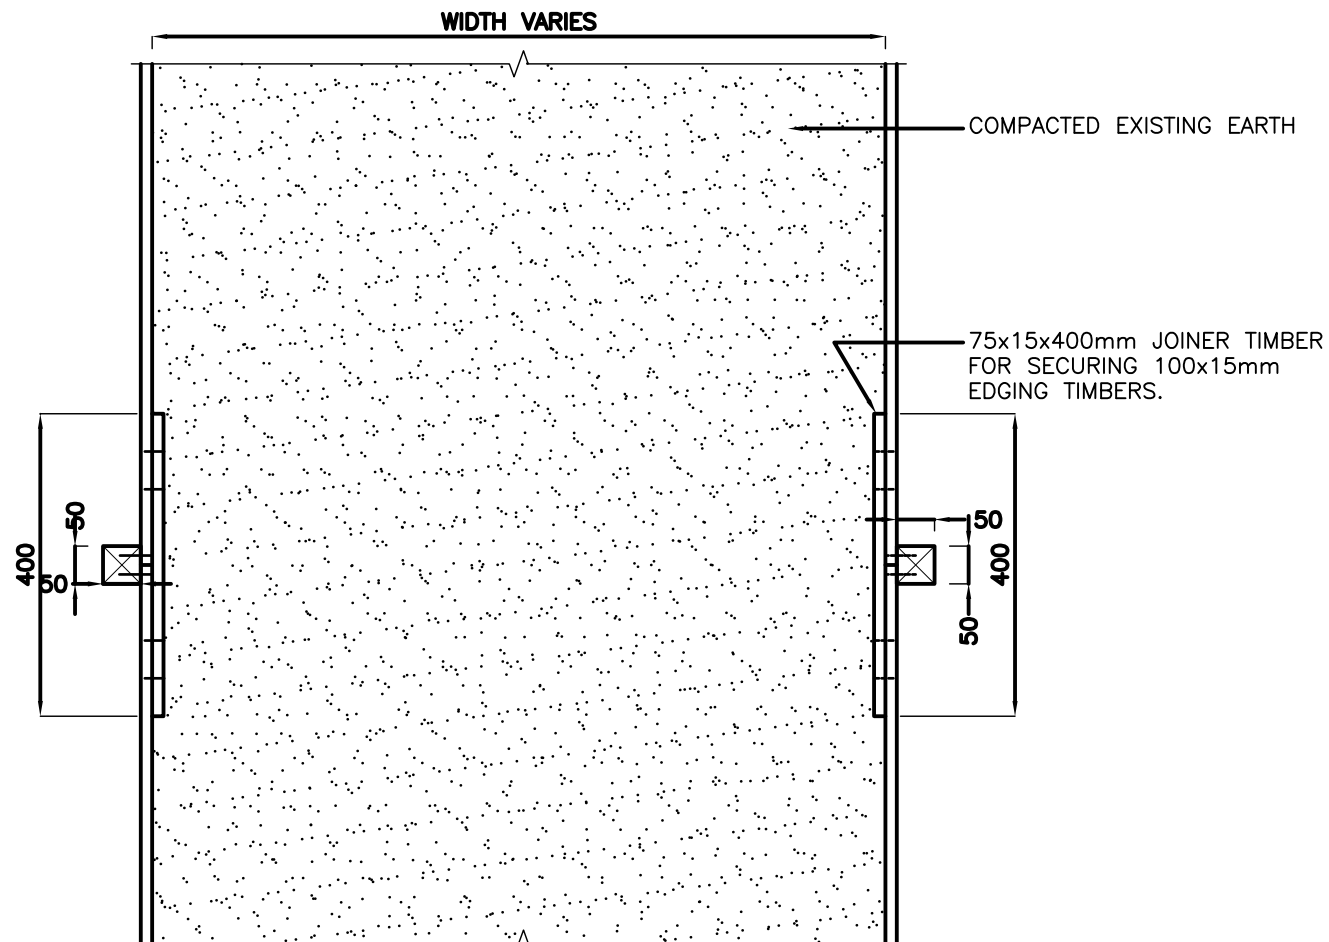

WALKING TRACK – PLAN

## GENERAL NOTES & SPECIFICATIONS


- ENSURE WALKING TRACKS ARE LOCATED IN ACCORDANCE WITH DETAILED LANDSCAPE PLAN AND PARKS CHAPTER OF INFRASTRUCTURE DESIGN PLANNING SCHEME POLICY.
- AUSTRALIAN STANDARDS SHALL BE IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE REFERENCED AUSTRALIAN STANDARDS EXCEPT WHERE VARIED BY SPECIFICATIONS AND/OR DRAWINGS.
- MATERIAL CHOICES ARE TO BE DETERMINED ON THE GROUNDS OF SUSTAINABILITY, LOW MAINTENANCE, VANDAL RESISTANCE, PRODUCT AVAILABILITY AND SUITABILITY TO THE CLIMATIC CONDITIONS. MATERIALS ARE TO BE LOCALLY SOURCED.
- REFER TO THE BRISBANE ACCESS AND INCLUSION PLAN 2012-2017 FOR FURTHER INFORMATION WHEN PLANNING AND DESIGNING THE BUILT ENVIRONMENT TO REASONABLY CONSIDER ACCESS AND INCLUSION FOR ALL WHERE APPROPRIATE.
- ENSURE MOWN HEIGHT OF GRASS (TURF) AREA FINISHES FLUSH WITH WALKING TRACK EDGE.
- ENSURE GARDEN AREAS (MULCH) AND NATURAL VEGETATION AREAS FINISH 25mm BELOW ADJACENT F.S.L's OF WALKING TRACK.
- ENSURE EVEN GRADE CROSS-FALLS MIN. 1:50 TO WALKING TRACKS.
- ALL DIMENSIONS IN MILLIMETRES (U.N.O.).

## TIMBER WORK NOTES

- TIMBER SHOULD BE SOURCED FROM LEGAL AND SUSTAINABLE SOURCES. TIMBERS ARE CONSIDERED ACCEPTABLE WHERE THERE IS A HIGH DEGREE OF CERTAINTY THAT THEY ARE FROM FORESTS, EITHER NATIVE OR PLANTATION, THAT ARE LEGALLY HARVESTED AND SUSTAINABLY MANAGED. THE CONTRACTOR IS TO SUBMIT EVIDENCE THAT THE TIMBER HAS BEEN OBTAINED FROM A LEGAL AND SUSTAINABLE SOURCE.
- ALL TIMBER TO BE ACQ PRESSURE TREATED OR TANALITH E (COPPER AZOL) TO AS 1608 TREATED ROUGH SAWN APPEARANCE GRADE HARDWOOD OF ONE SPECIES.
- ALL EXPOSED EDGES TO RECEIVE MIN. 5mm WIDE ARRIS.
- PRIOR TO INSTALLATION, ALL CUTS, EDGES, JOINTS TO RECEIVE LIBERAL COATINGS WITH AN APPROVED TIMBER PRESERVATIVE.
- ALL TIMBER IN CONTACT WITH GROUND TO BE PRESERVATIVE TREATED TO HAZARD CLASS H5 TO AS 1604 AND HAVE A DURABILITY CLASS 1 OR 2 TO AS 5604.
- ALL TIMBER TO BE FREE OF KNOTS, SPLINTERS, CRACKS OR ANY MAJOR DEFECT.
- TIMBER PRESERVATIVES – WHERE NO FINISH SPECIFIED, ALL TIMBER TO RECEIVE 3 No COATS OF CLEAR APPROVED TIMBER PRESERVATIVE SUCH AS COPPER NAPHTHENATE OIL (FOR ABOVE GROUND USE) AND COPPER NAPHTHENATE EMULSION (FOR BELOW GROUND USE).
- LOCATE TIMBER EDGE AS NOTED ON PLAN.
- FIX EDGE WITH 2 (MIN.) NAILS PER STAKE.
- TO FORM CURVES SAW CUT RELIEF TO EDGE TO PROMOTE EASE OF BENDING. STAKE AT CLOSER CENTRES WHERE REQUIRED.

## FIXTURES/FITTINGS NOTES

- ALL WORKMANSHIP AND MATERIAL SHALL BE IN ACCORDANCE WITH AS4100 & AS/NZS 1554.
- ALL FIXTURES/FITTINGS UNLESS SPECIFIED ARE TO BE HOT DIPPED GALVANISED UNLESS IN VICINITY OF SALTWATER/SPRAY, ENSURE ALL FASTENERS SHALL BE STAINLESS STEEL. PLASTIC SEPARATORS SHALL BE PROVIDED TO AVOID CONTACT BETWEEN DISSIMILAR MATERIALS. STAINLESS STEEL GRADE 316 TO BE USED. WHERE POSSIBLE ALL FIXINGS TO BE TAMPER/VANDAL PROOF TO MINIMISE DAMAGE OR THEFT.

DRAWING AUTHORISED FOR PUBLICATION PAUL COTTON SIGNATURE ON ORIGINAL DATED 03/09/04 MANAGER INFRASTRUCTURE MANAGEMENT R.P.E.Q: 2546					DESIGN	Std Dwgs WG	DATE	OCT '13		<b>BRISBANE CITY COUNCIL STANDARD DRAWING</b>		SCALE	1:10				
DESIGN APPROVED LAUREN TEMPLEMAN SIGNATURE ON ORIGINAL DATED 31/08/04					DRAWN	CPO - P&D	DATE	OCT '13				DWG No.	<b>BSD-5216</b>				
A	Drawing Converted From UMS Series April 2014			APR '14	APR '14	APR '14	CHECKED	UMD - E&P & IMB		DATE	OCT '13	DRAWING FILENAME	BSD-5216.dwg	ORIGINAL SIZE	A3	REVISION	A
ISSUE	AMENDMENT			DRAWN DATE	CHK'D DATE	APPR'D DATE	ASSOCIATED PLANS	SUPERSEDES UMS-747			PRICIPAL PROGRAM OFFICER PARKS						