



NOTES:

1. THE MINIMUM RADIUS OF THE OUSIDE KERB ALIGNMENT MUST BE 20m.
2. THE TREATMENT FOR THE CENTRE ISLANDS CAN COMPRISE ONE OF THE FOLLOWING METHODS:
 - LOW MAINTENANCE LANDSCAPING WITH A ONE METRE WIDE CONCRETE BACKING STRIP BEHIND THE MEDIAN KERB
 - A COMBINATION OF LANDSCAPING AND CARPARKING BAYS.
3. ALL DIMENSIONS IN METRES (U.N.O.).

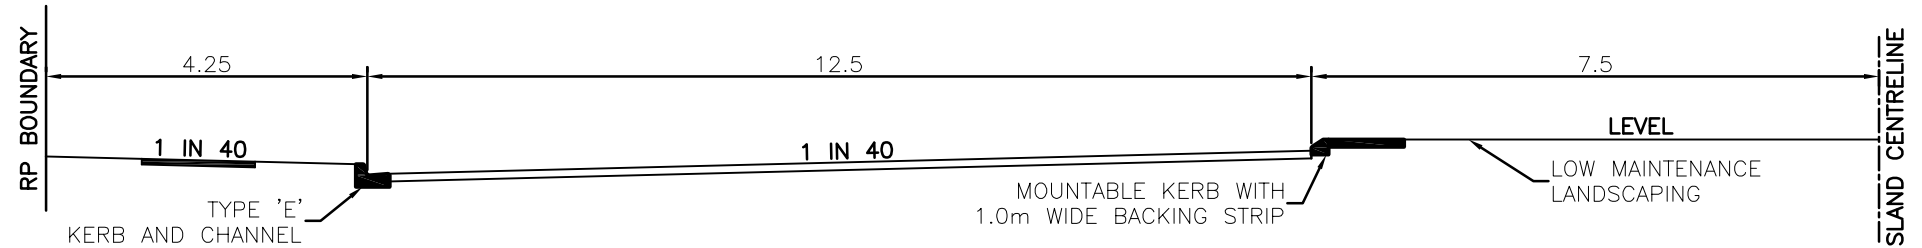

HALF SECTION A
NOT TO SCALE

					DRAWING AUTHORISED FOR PUBLICATION P COTTON SIGNATURE ON ORIGINAL DATED 21/03/06 MANAGER CITY ASSETS, R.P.E.Q. 2 5 4 6				DESIGN	BCC (IMB)	DATE	Jul '04	 BRISBANE CITY COUNCIL STANDARD DRAWING		SCALE		NOT TO SCALE	
					DESIGN APPROVED B HANSEN SIGNATURE ON ORIGINAL DATED 28/02/06 PRINCIPAL ENGINEER STRATEGIC INFRASTRUCTURE MANAGEMENT				DRAWN	CA (DJL)	DATE	Jul '04			DWG No.		BSD-3002	
A	Drawing Converted from UMS Series April 2014				APR '14	APR '14	APR '14	DRAWING FILENAME				BSD-3002.dwg		ORIGINAL SIZE		A3	REVISION	A
ISSUE	AMENDMENT				DRAWN DATE	CHK'D DATE	APPR'D DATE	ASSOCIATED PLANS				SUPERSEDES UMS-813		TURNING PROVISIONS FOR INDUSTRIAL ACCESS				