

GENERAL SIGN NOTES

- ALL DIMENSIONS IN MILLIMETRES (U.N.O.).
- REFER TO BSD - 10501 (SHEETS 1 AND 2) FOR STRUCTURAL NOTES.
- REFER TO BSD - 10503 FOR GRAPHIC NOTES
- REFER TO BSD - 10504 FOR STANDARD SIZES AND EXAMPLE LAYOUTS.
- REFER TO BSD - 10506 FOR ORDINANCE SIGNAGE DETAILS.
- REFER TO BSD - 10507 FOR PICTOGRAM SUITE DETAILS.

SIGNAGE PANEL:


- PANELS TO BE 16 GAUGE, 1.6mm THICK ALUMINIUM SHEETING.
- CORNERS OF PANEL TO HAVE 5mm RADIUS WITH ALL CORNERS / EDGES TO BE FREE OF BURRS.
- ANTI-GRAFFITI CLEAR FILM OR SIMILAR PRODUCT TO FINISHED SURFACE OF PANEL.
- REFER TO BSD - 10503 AND BSD - 10504 FOR SIZES OF SIGN PANELS, TYPICAL LAYOUTS AND GRAPHIC NOTES.

SIGNAGE STIFFENING RAILS:

- REFER TO DEPARTMENT OF TRANSPORT AND MAIN ROADS DRAWING 1369 FOR DETAILS OF SIGN RAIL EXTRUSIONS.
- SIGN RAIL TO BE 44mm WIDE X 40mm DEEP AND 3mm THICK. (TYPE 2A AS PER TRANSPORT AND MAIN ROADS DRAWING 1369).
- SIGN RAIL TO BE POP RIVETED TO SIGN USING 'HENHUB' SELF PIERCING RIVETING SYSTEM OR SIMILAR APPROVED, AT A SPACING BETWEEN 250-300mm APART DEPENDING ON BEST PLACEMENT IN RELATION TO SIGN DESIGN / PANEL COMBINATIONS.
- SIGN RAILS ARE TO BE TYPICALLY POSITIONED 100mm IN FROM TOP AND BOTTOM EDGE OF SIGN AND 50mm FROM SIDE EDGES OF SIGN. IN SOME CASES THIS IS TO VARY TO ENSURE SIGN TEXT AND GRAPHICS ARE UNOBSTRUCTED BY FIXING HOLES.


SIGNAGE POSTS:

- SIGNS ARE TO BE ATTACHED TO POSTS USING STANDARD (API BRAND OR APPROVED SIMILAR) SADDLE BRACKETS TO SUIT SIZE OF POST. SADDLE BRACKETS TO BE STAINLESS STEEL WITH STAINLESS STEEL NUTS AND BOLTS.
- BLACK PLASTIC CAPS TO BE INSTALLED TO END OF POSTS. END CAPS TO SUIT POST SIZE AS SPECIFIED.

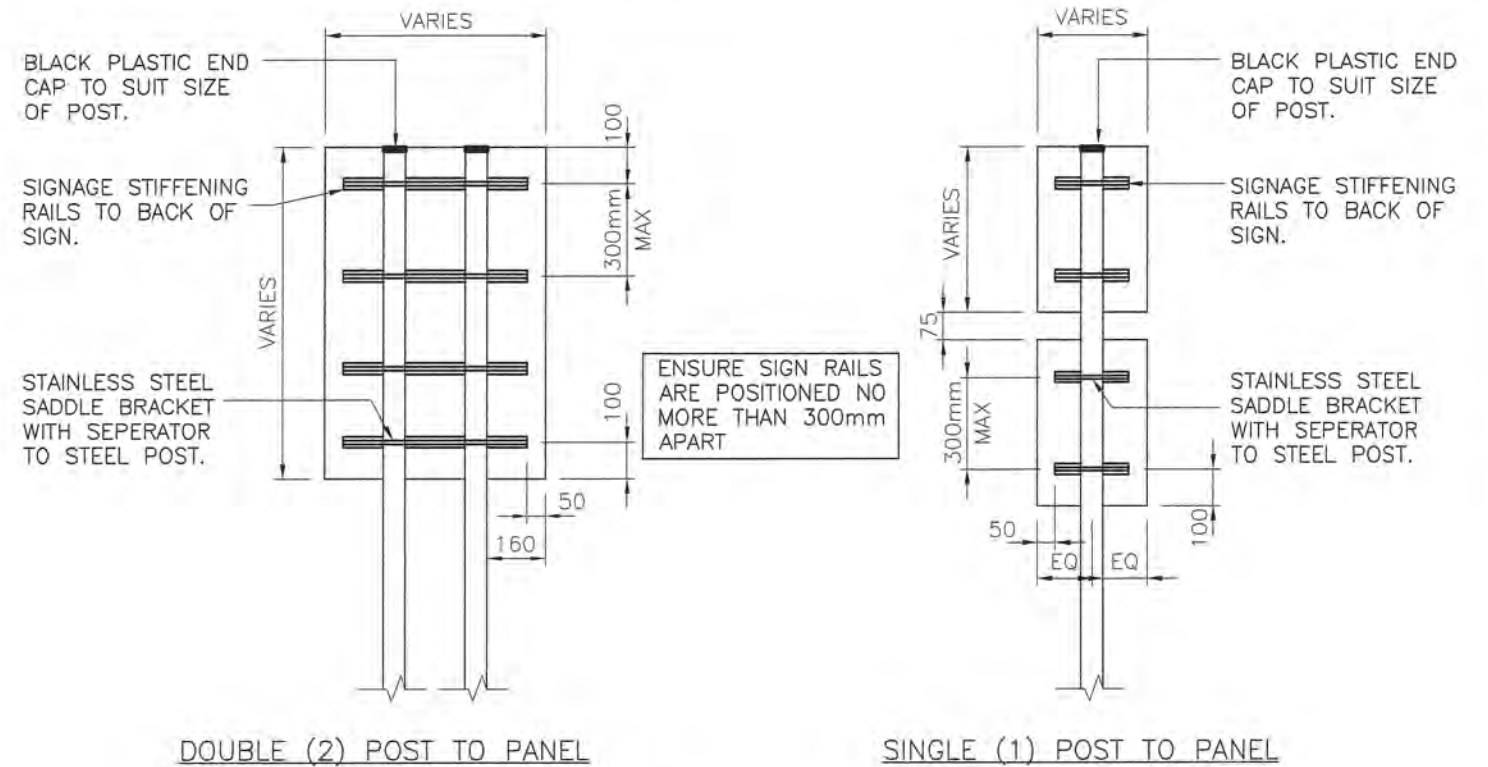

FIXING DETAILS

SCALE: 1:20

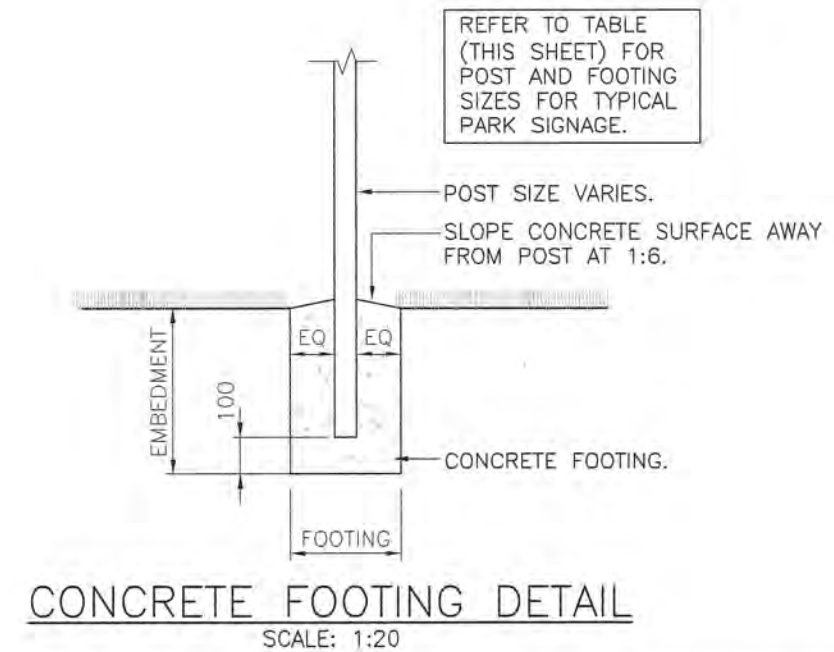

CONCRETE FOOTING DETAIL

SCALE: 1:20

TYPICAL POST, FOOTING AND EMBEDMENT SIZES FOR STANDARD SIGNS SHOWN ON BSD - 10504				
SIGNAGE PANEL SIZES HEIGHT x WIDTH	NUMBER OF POST	TERRAIN CATEGORY = 1.5 and ABOVE		
		POST (STEEL) DIAMETER x THICKNESS	FOOTING	EMBEDMENT
900x1200	2	76.1x3.2 CHS	300 Dia (2 FOOTINGS)	800
1200x900				
600x900 (MAX 2 600x900 PANELS)				
900x600	2	60.3x2.9 CHS	450 Dia	900
400x600 x2 Panels				
600x400 x2 Panels	1	76.1x3.2 CHS	300 Dia	800
400x600				
450x300 (WITH MAX 3 OPTIONAL 200x300 PANELS)				
300x450 x3 Panels				
200x300				
450x300 x2 Panels	1	60.3x2.9 CHS	300 Dia	700
300x200 x3 Panels				

STRUCTURAL DESIGN CERTIFICATION

DESIGN <i>Zhuangzhi Hu</i>	DESIGN CHECK <i>Lerita Mendis</i>	AUTHORISED FOR ISSUE <i>[Signature]</i>
Zhuangzhi Hu RPEQ:13885 2015.03.20 11:40:17 +10'00'	Lerita Mendis RPEQ:8950 2015.03.20 12:09:42 +10'00'	Bala Balakumar, RPEQ:3963 2015.03.20 14:01:31 +10'00'

BRISBANE CITY COUNCIL STANDARD DRAWING

SCALE 1:20	
DWG No. BSD-10502	
ORIGINAL SIZE A3	REVISION A

PARK SIGNAGE - TYPICAL INSTALLATION DETAILS AND NOTES

DRAWING AUTHORISED FOR PUBLICATION				DESIGN	CPO - P&D	DATE	MAR '15
ASSET ENGINEERING MANAGER STRATEGIC ASSET MANAGEMENT DESIGN APPROVED				DRAWN	CPO - P&D	DATE	MAR '15
[Signature]				CHECKED	CPS - NEWS	DATE	MAR '15
A Drawing Converted From UMS Series March 2015				DRAWING FILENAME	BSD-10502.dwg		
ISSUE AMENDMENT				ASSOCIATED PLANS	SUPERSEDES UMS-775		
DRAWN DATE	MAR '15	CHK'D DATE	MAR '15	[Signature]			
APPR'D DATE	MAR '15	SENIOR CO-ORDINATOR PARKS					

